



SolarLake 5500 / 7000 / 8500 / 10000TL-PM

SIMPLE. FLEXIBLE.


- Simplified system design due to dual MPPT and wide input voltage range up to 1,000 V
- Free site selection due to IP65
- Parameter and country code setting during initial start up

OPEN. INTERACTIVE.

- Interface selection – Ethernet, Wi-Fi and RS485 for more flexible configuration and system monitoring
- Multi-lingual 3.5" TFT LCD display
- Easy key pad operation
- Digital inputs for the economic connection of a ripple control receiver
- Configurable multi-function relay output
- Integrated data logger incl. SD card slot

SECURE. EFFICIENT.

- Highest earnings through max. efficiency of > 98 %
- Safe operation due to integrated DC-switch
- Free access to the Samil Power monitoring portal
- 5 year standard guarantee

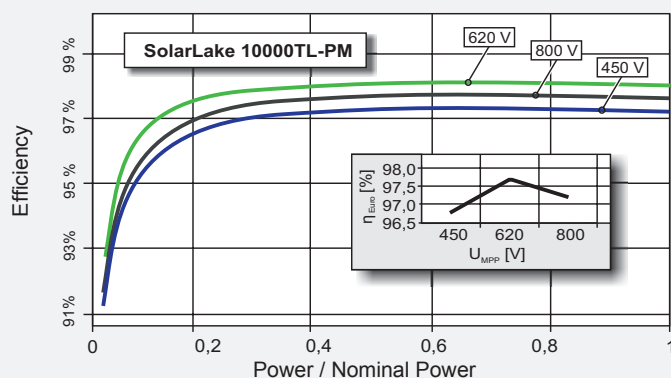

	SolarLake 5500TL-PM	SolarLake 7000TL-PM	SolarLake 8500TL-PM	SolarLake 10000TL-PM
Input (DC)				
Max. DC power (@cosφ=1)	5750 W	7400 W	8900 W	10350 W
Max. input voltage	1000 V			
MPP voltage range / rated input voltage	250 V - 800 V / 620 V	320 V - 800 V / 620 V	390 V - 800 V / 620 V	450 V - 800 V / 620 V
Min. input voltage / initial input voltage	250 V / 300 V			
Max. input current input A / input B	11.5 A / 11.5 A			
Max. input current per string input A / input B	11.5 A / 11.5 A			
Number of independent MPP inputs / strings per MPP input	2 / 1			
Output (AC)				
Rated power (@ 230 V / 50 Hz)	5500 W	7000 W	8500 W	10000 W
Max. apparent AC power	5500 VA	7000 VA	8500 VA	10000 VA
Nominal AC voltage / range	3 / N / PE, 230 V, 400 V / 180 V - 277 V per phase			
AC frequency / range	50 Hz, 60 Hz / 44 Hz - 55 Hz, 54 Hz - 65 Hz			
Rated grid voltage / rated grid frequency	230 V / 50 Hz			
Max. output current	8 A	10 A	12.3 A	14.5
Power factor at rated power	1			
Displacement power factor, adjustable	0.8 leading - 0.8 lagging			
Feed-in phases / connection phases	3 / 3			
Efficiency				
Max. Efficiency / European weighted efficiency	98.0 % / 97.2 %	98.0 % / 97.5 %	98.1 % / 97.5 %	98.1 % / 97.6 %
Protective devices				
DC disconnect device / AC disconnect device	○ / - (EU: ● / -)			
Ground fault monitoring / grid monitoring	● / ●			
DC reverse polarity protection / AC short-circuit current capability	● / ●			
Galvanic isolation	-			
All-pole-sensitive residual-current monitoring	●			
Protection class (according to IEC 62103) / Overvoltage category (according to IEC 60664-1)	I / II (DC), III (AC)			
General data				
Dimensions (W / H / D)	440 / 580 / 210 mm			
Weight	24 kg			
Operating temperature range	-25 °C ... +60 °C			
Noise emission (typical)	< 35 dB			< 47 dB
Self-consumption (night)	0 W			
Topology	Transformerless			
Cooling concept	Convection			Fan
Degree of protection (according to IEC 60529)	IP65			
Maximum humidity (non-condensing)	95 %			
Features				
DC connection / AC connection	Multi-Contact MC4, Amphenol MC4 / AC-plug			
Display	3.5" TFT LCD			
Interface: RS485 / Wi-Fi / Ethernet	○ / ○ / ●			
Multi-function relay / digital input	3 / 4			
Guarantee: 5 / 10 / 15 / 20 / 25 years	● / ○ / ○ / ○ / ○			
Certificates and approvals (additional on request)	CE, VDE 0126-1-1, G83/2, EN 61000-3-2/3, EN 6100-6-1/2/3/4, IEC 62109-1/2, VDE AR-N4105, CEI 0-21, AS 4777.2/3, AS 3100:2009, C10/11, EN 50438, UTE C15-712-1, IEC 62116, IEC 61727			



SAMIL POWER
Expert for PV Grid-tied Inverters

Samil Power Co., Ltd. (China)

Sales and Service Center, Wuxi
No.52, Huigu Innovation Park, Huishan District, Wuxi,
Jiangsu Province, 214174 P.R.C
T: +86 (0) 510 8359 3132
F: +86 (0) 510 8181 9678
E: info@samilpower.com

Samil Power Co., Ltd. (China)

Office, Shenzhen
7/F, Smart Power Grid Industry Park.
No.1124, Nanshan Avenue.
Nanshan district. Shenzhen, P.R.C
T: +86 (0) 755 2781 2568
F: +86 (0) 755 2781 3866

Samil Power Co., Ltd. (China)

Office, Beijing
Room 706, Building 6, Wanda plaza,
No.93 Jianguo Road,
Chaoyang District, Beijing, 100020 P.R.C
T: +86 (0) 10 5820 4482
F: +86 (0) 10 5820 3961

Samil Power Co., Ltd. (China)

Factory, Suqian
No.6 Xuefengshan Road,
Suyu District, Suqian,
Jiangsu Province, 214174 P.R.C

Samil Power US Ltd. (USA)

3478 Buskirk Avenue, Suite 1000,
Pleasant Hill, CA 94523
T: +1 (925) 930 3924
E: usa@samilpower.com

Support Center Australia

T: 02-85203242 or 1300 134793
E: service-australia@samilpower.com

Support Center Deutschland

T: 089-12140704
E: service-germany@samilpower.com

Centro Assistenza Italia

T: 02-60063040
E: service-italy@samilpower.com

Samil Power Ausco Pty Ltd. (Australia)

Sydney Business and Technology Centre
Unit 5/2 Railway Parade
Lidcombe NSW 2141
T: +61 (0) 2 9643 7788
E: australia@samilpower.com

Samil Power GmbH (Deutschland)

Siemensstrasse 1 + 1a
85716 Unterschleissheim-Lohhof
T: +49 (0) 89 8563341 10
F: +49 (0) 89 8563341 29
E: germany@samilpower.com

Samil Power s.r.l. (Italia)

Sede Legale: Corso di Porta Vittoria 18
20122 Milano
T: +39 02 45 077 584
F: +39 02 40 043 490
E: italy@samilpower.com

Samil Power UK Ltd. (UK)

Unit 19 Horseshoe Park Horseshoe Lane
Pangbourne Reading RG8 7JW
T: +44 (0) 118 984 4481
F: +44 (0) 118 984 4745
E: uk@samilpower.com

Samil Power France SARL (France)

10 Boulevard Marius
Vivier Merle
69003 Lyon
E: france@samilpower.com

Support Center Nederland

T: 020-7018205
E: service-netherlands@samilpower.com

Support Center UK

T: 0118-4029490
E: service-uk@samilpower.com

Support Center USA

T: 001-4154290135
E: service-usa@samilpower.com

